


MACPLUG ANCHOR

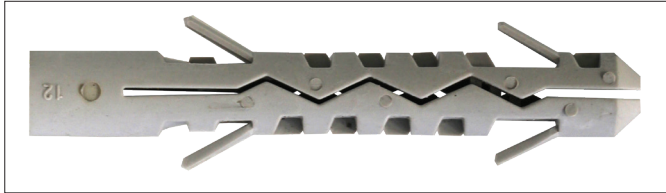

19.11 PRODUCT DATA

Material:

- Nylon Polyamida

19.12 PRODUCT DESCRIPTION


The Macsim Macplug is made from quality nylon polymide which has a screw guide and anti rotation lugs. The plug expands by turning the screw into the plug. The Macplug is designed for general fixing into solid brick or concrete

19.14 APPLICATIONS

- Used for Light Duty Loads
- Fixing into solid brick and concrete

19.13 INSTALLATION METHOD

1. Drill correct diameter hole through the component and into the base at least as deep as the overall plug length.
2. Insert the Macplug into the hole. Align the hole in fastened component to the Macplug position and insert the correct gauge screw with enough length to reach the end of the plug. Tighten screw until the component is securely fixed.

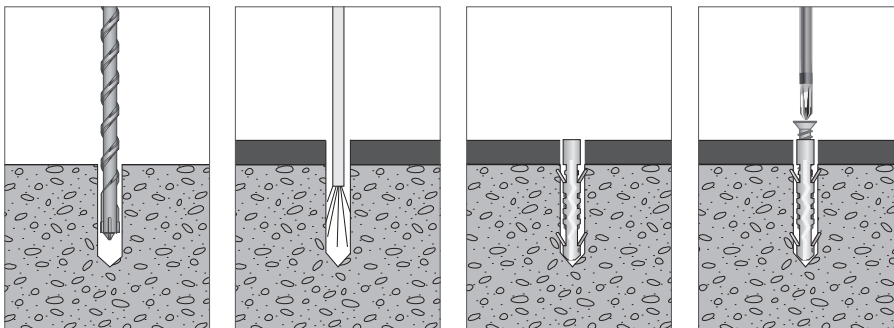

CODE	Size (mm)	Hole Diameter (mm)	Embedment Depth (mm)	Max. Fasten Thickness (mm)
1505	5 x 25	5	25	4-6
1506	6 x 30	6	30	6-8
1507	7 x 38	7	40	8-10
1508	8 x 40	8	40	10-14
1510	10 x 50	10	50	8mm Dia.
1512	12 x 60	12	60	10mm Dia.