


NYLON NAIL IN PLUG ANCHOR

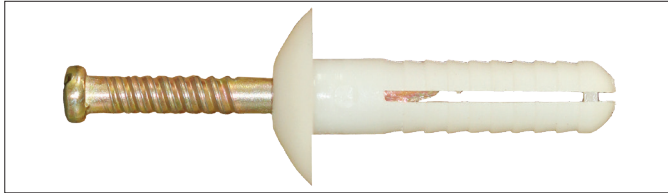


20.12 PRODUCT DESCRIPTION

The Macsim Nylon Nail in Plug has an assembled nail and comes in 3 different head types (Mushroom, Round, Countersunk). The Nail in Plug is expanded by hammering the nail into the plug. It is designed for quick location fixing into solid brick or concrete.

20.13 INSTALLATION METHOD

1. Drill correct diameter hole through the component and into the base at least as deep as the overall plug length.
2. Insert the Nail In Plug into the hole. Hammer home the nail until head is located in the plug. Do not over hit or the plug will be damaged.

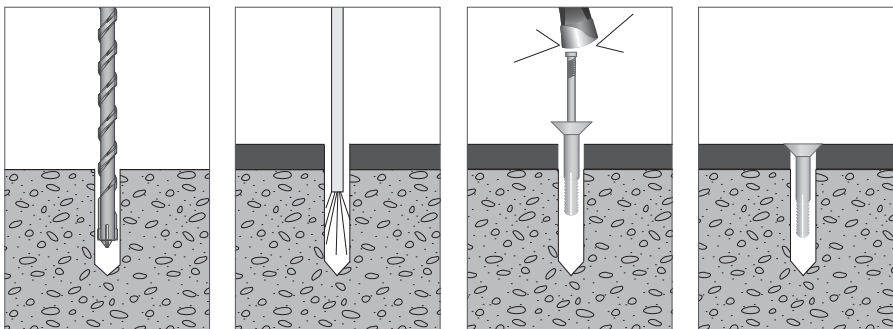

20.11 PRODUCT DATA

Material:

- Nylon Polyamida

Head Types:

- Countersunk. Yellow Zinc/ Stainless Steel
- Mushroom: Yellow Zinc/ Stainless Steel
- Round: Yellow Zinc/ Stainless Steel

20.14 APPLICATIONS

- Used for Light Duty Loads
- Fixing into solid brick and concrete

20.15 ADVANTAGES

- Quick Location Fixing into Solid Brick and Concrete

CODE	Size (mm)	Hole Diameter (mm)	Embedment Depth (mm)	Max. Fasten Thickness (mm)
05*519	5 x 19	5	15	3
05*525	5 x 25	5	18	5
05*540	5 x 40	6.5	18	20
05*625	6.5 x 25	6.5	20	4
05*640	6.5 x 40	6.5	25	13
05*650	6.5 x 50	6.5	25	23
05*675	6.5 x 75	6.5	25	48
05*6100	6.5 x 100	6.5	25	73